
Phoenix Tapes®
Simbolul Calității

Street Drumul Gilaului no. 5N
District 4, Bucharest
E-mail: office@phoenixtapes.ro
Phone: +4 021.335.1172
Mobile: +4 0729.012.783

PRODUCT SPECIFICATION

PTFE 132-22

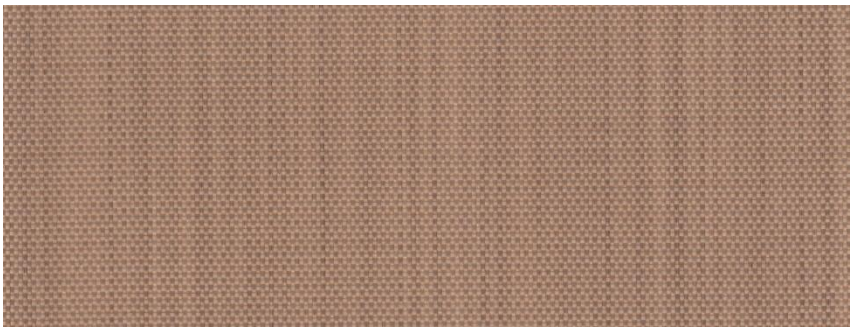

Product	Product category	Coating
PTFE GLASS FABRIC	INDUSTRIAL SERIES	PTFE

Properties	Metric		Imperial	
Standard width(s) *Please ask for other widths*	1000, 1250, 1500	mm	39.5, 49.3, 59.1	inches
Nominal thickness	0,22	mm	0.0087	inches
Weight	455	gr/m²	13.42	oz/sq yd
PTFE content	53	%	53	%
Tensile strength	2300	N/5 cm	263	Ibs/inches
Temperature resistance	-150 to +260	°C	-238 to +500	°F

This line combines quality glass fabrics with medium level of PTFE coating to achieve cost effective performance for mechanical applications such as heat-sealing, release sheets, belting. The product can be used in direct contact with food. The product does not contain banned substances as described in RoHS directive and will not affect RoHS compliance.

This product has been manufactured in a facility certified by ISO 9001 Quality Management System.

Note: Nominal thickness, weight and tensile strength values are typical and are not intended as a specification minimum.
Nominal thickness tolerance: ±0,02 mm - Weight tolerance g/m² = ±%5 - Tensile strength tolerance -%10
All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained herein are based on test results PHOENIX INVEST believes to be reliable, but they are not to be construed in any manner as warranties expressed.