
Phoenix Tapes®
Simbolul Calității

Street Drumul Gilaului no. 5N
District 4, Bucharest
E-mail: office@phoenixtapes.ro
Phone: +4 021.335.1172
Mobile: +4 0729.012.783

PRODUCT SPECIFICATION

PTFE 132-13

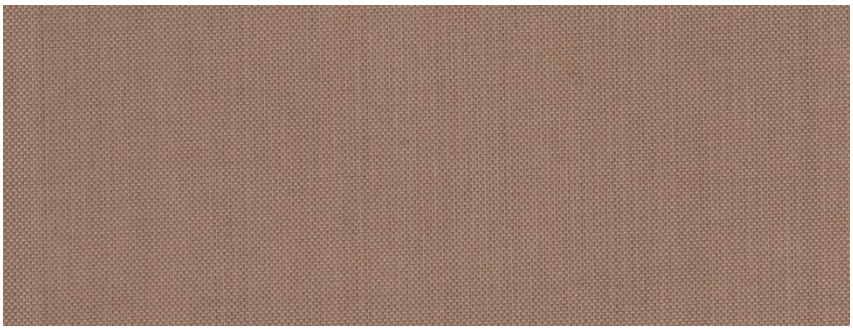

Product	Product category	Coating
PTFE GLASS FABRIC	STANDARD SERIES	PTFE

Properties	Metric		Imperial	
Standard width(s) *Please ask for other widths*	1000, 1250, 1525, 2000	mm	39.5, 49.3, 60, 78.8	inches
Nominal thickness	0,125	mm	0.0049	inches
Weight	255	gr/m²	7.52	oz/sq yd
PTFE content	58	%	58	%
Tensile strength	1200	N/5 cm	137	Ibs/inches
Temperature resistance	-150 to +260	°C	-238 to +500	°F

These products provide a superior non-stick surface to achieve performance in a wide variety of applications with a lower cost alternative to Premium Series.
The product can be used in direct contact with food. The product does not contain banned substances as described in RoHS directive and will not affect RoHS compliance.

This product has been manufactured in a facility certified by ISO 9001 Quality Management System.

Note: Nominal thickness, weight and tensile strength values are typical and are not intended as a specification minimum.
Nominal thickness tolerance: ±0,01 mm - Weight tolerance g/m² = ±%5 - Tensile strength tolerance -%10
All technical data are based on average values. These values are not intended for use in preparing specifications. Technical information contained herein are based on test results PHOENIX INVEST believes to be reliable, but they are not to be construed in any manner as warranties expressed.